


DAW-HQ40

DATI TECNICI TECHNICAL DATA

Connessioni Fluido: 1"1/2 BSP
Fluid connections


Connessione aria: 10 mm
Air connection

Pressione Max: 8 bar
Max delivery head

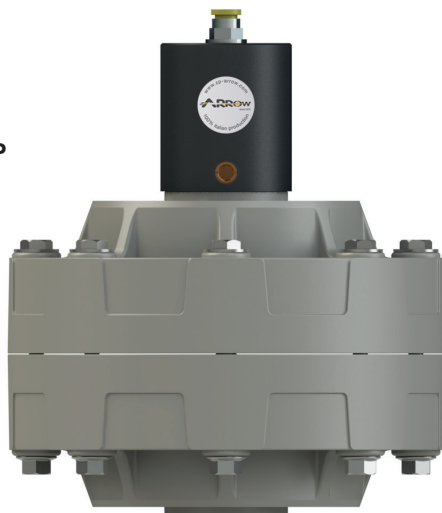

DAW-HQ40 PVDF+CF

LxH 233x270
kg 4
Temp. max 95°C
Temp. min -20°C



DAW-HQ40 POMc

LxH 233x270
kg 3,9
Temp. max 80°C
Temp. min -5°C



**APPLICABILE A:
APPLY TO:**


**PAW-HQ170
PAW-HQ250
PAW-HQ400**

DAW-HQ40 PP

LxH 223x270
kg 3,8
Temp. max 65°C
Temp. min -4°C

DAW-HQ40 AISI

HxLxP(W) 233x275
kg 5,9
Temp. max 95°C
Temp. min -20°C




DAW-HQ50

DATI TECNICI TECHNICAL DATA

Connessioni Fluido: 2" BSP
Fluid connections


Connessione aria: 12 mm
Air connection

Pressione Max: 8 bar
Max delivery head

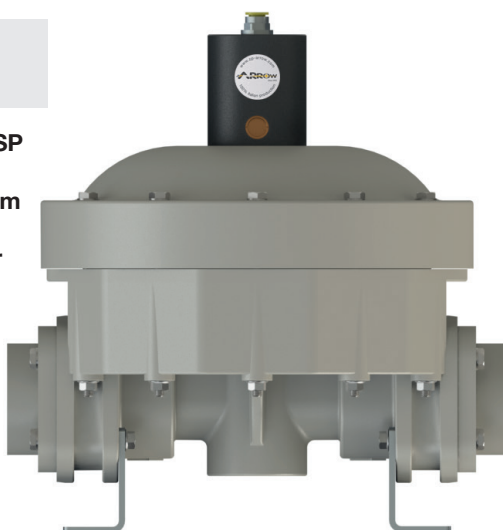


DAW-HQ50 PVDF+CF

LxH 404x420
kg 17
Temp. max 95°C
Temp. min -20°C



DAW-HQ50 ALU

LxH 404x420
kg 14,3
Temp. max 90°C
Temp. min -20°C



**APPLICABILE A:
APPLY TO:**

**PAW-HQ700
PAW-HQ1000**

DAW-HQ50 PP

LxH 404x420
kg 13,7
Temp. max 65°C
Temp. min -4°C

DAW-HQ50 AISI

HxLxP(W) 350x418
kg 21,6
Temp. max 95°C
Temp. min -20°C

